



ESTD-1973

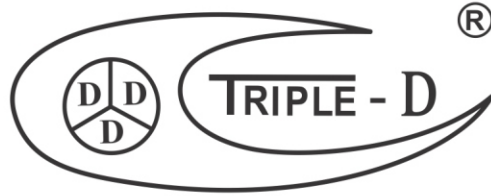

• Distinctive • Durable • Dependable

Manufacturer of Electric Motor (0.18 H.P. to 20 H.P.), Brake Motor, Gear Motor
Vibrator Motor, Industrial Pump, Belt Sander, Tool & Buffing Grinder

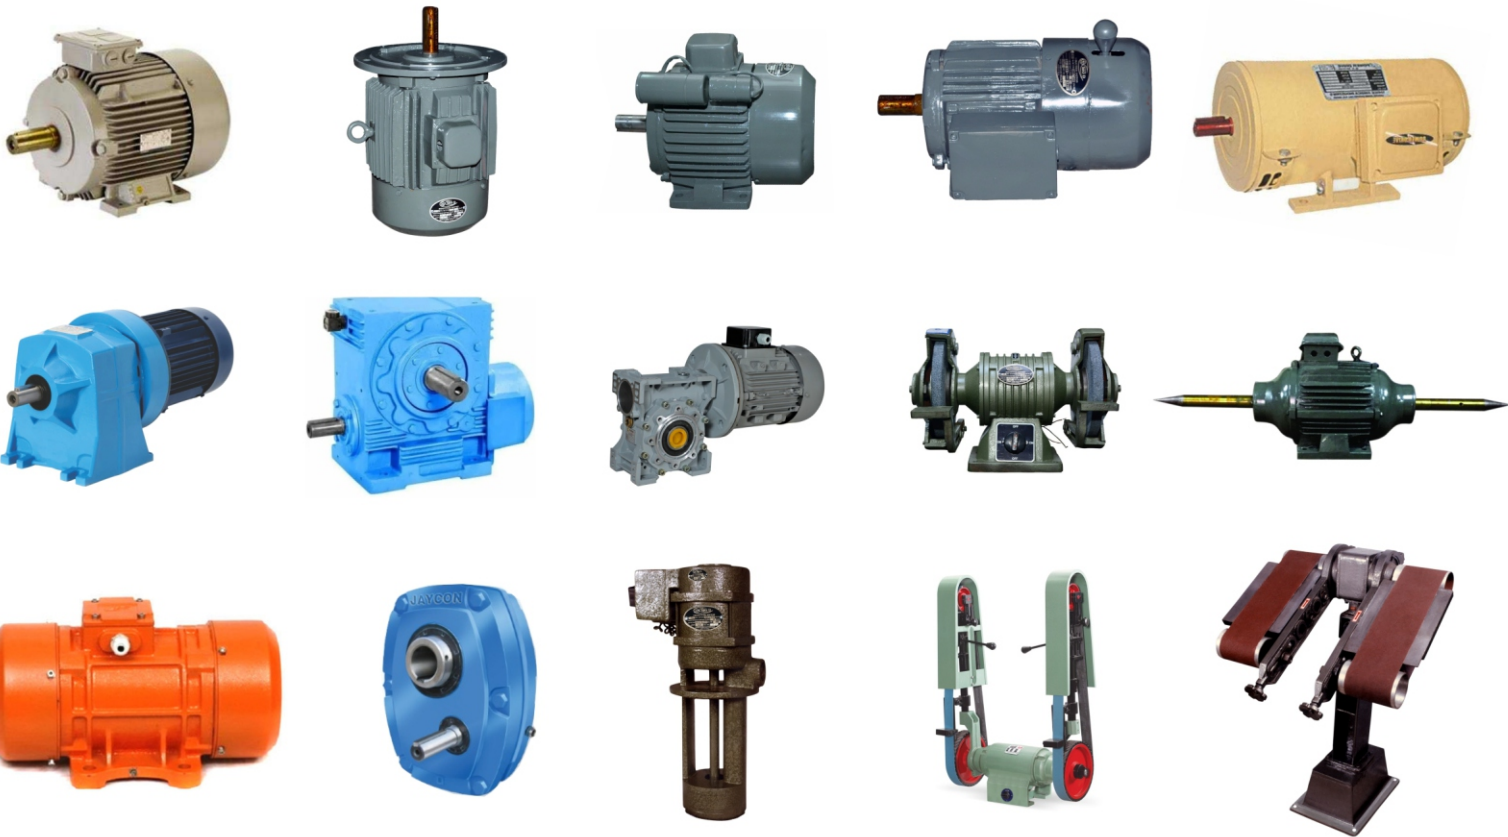

FOR THOSE
WHO BELIVE
IN QUALITY

IE2



3 PHASE STANDARD ELECTRIC MOTORS



H.P. : 0.18 H.P. to 20.0 H.P.
Voltage : 415v
R.P.M. : 540 / 720 / 960 / 1440 / 2800
Frame : 63F / 71F / 80F / 90F / 100F / 112F / 132F / 160F
Rating : 0.13 Kw to 14.9 Kw
Mounting : Flange (B5), Foot (B3), Face (B14)

1 PHASE STANDARD ELECTRIC MOTORS



H.P. : 0.18 H.P. to 5.0 H.P.
Voltage : 220v
R.P.M. : 960 / 1440 / 2800
Frame : 63F / 71F / 80F / 90F / 100F / 112F / 132F
Rating : 0.13 Kw to 3.72 Kw
Mounting : Flange (B5), Foot (B3), Face (B14)

D.C. MOTOR




H.P. : 0.5 H.P. to 20.0 H.P.
Voltage : 220v & 415v
R.P.M. : 1440 / 2800
Frame : 80F / 90F / 100F / 112F / 132F / 160F
Rating : 0.373 Kw to 14.9 Kw
Mounting : Flange (B5), Foot (B3)
Type : Shunt, Series, Compound

BRAKE MOTOR



H.P. : 0.5 H.P. to 20.0 H.P.
Voltage : 415v
R.P.M. : 540 / 720 / 960 / 1440 / 2800
Frame : 71F / 80F / 90F / 100F / 112F / 132F / 160F
Rating : 0.373 Kw to 14.9 Kw
Mounting : Flange (B5), Foot (B3), Face (B14)
Brake Type : AC Fail Safe Brake, DC Brake

IN LINE - HELICAL GEAR MOTOR

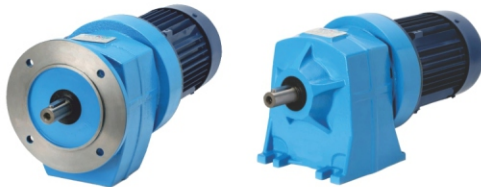

H.P. : 0.18 H.P. to 20.0 H.P.
Voltage : 220v & 415v
Ratio : 1:2.5 to 1:480.
Rating : 0.13 Kw to 14.9 Kw
Mounting : Flange (B5), Foot (B3)

WORM SPEED REDUCER GEARBOX



H.P. : 0.18 H.P. to 20.0 H.P.
Ratio : 1:5 to 1:4900.
Rating : 0.13 Kw to 14.9 Kw
Center Distance (NU) : 1.1 to 17.0

COOLANT PUMP



H.P. : 0.18 H.P. to 3.0 H.P.
Voltage : 220v & 415v
R.P.M. : 1440 / 2800
Rating : 0.13 Kw to 2.2 Kw
L.P.M. : 10 to 250

NMRV WORM GEAR MOTOR



H.P. : 0.18 H.P. to 20.0 H.P.
Voltage : 220v & 415v
Ratio : 1:7.5 to 1:100.
Rating : 0.13 Kw to 14.9 Kw
Box Size : 30, 40, 50, 63, 75, 90, 110, 130

INTRODUCTION

Motors & Gear Box - That is what we stand for. A premier company which manufactures Electric Motor (0.18 H.P. to 20 H.P.), Brake Motor, Gear Motor, Vibrator Motor, Industrial Pump, Belt Sander Tool & Buffing Grinder, provides the force that drives your industry.

Triple-D Motors Established in 1973, having manufacturing facility at surat - gujarat, has a rich experience of over 35 years & Served 10000+ Clients.

Our Company produces various kinds of standard & non standard motors. The use of superior quality raw materials contribute to the manufacture of highly reliable motors. State of the art automatic machinery with use of C.N.C. machines & cylindrical grinders, hi-tech R & D facilities & well equipped test laboratory, form a strong foundation for quality & performance.

Triple-D Brand has been widely accepted in all applications including machine tools, blowers, compressor, material handling equipment, textile machinery, diamond machinery, construction equipment, Crane Application, Stone Crusher, general engineering applications and wide range of applications.

MATERIAL & PROCESS ADVANTAGE :

- **Stamping:** Imported & Indian cold rolled non grain oriented (CRNGO) high silicon steel.
- **Copper Wire:** Super enameled dual coat copper wire & winding process for motors is done by automatic stator winding line up [designed in USA] for better quality & fast production of motor winding.
- **Varnish:** Varnish with high dielectric strength almost elimination chances of insulation failure.
- **Bearing:** Double sealed [metallic sealing] ball bearings lubricated for life with high quality grease.
- **Rotor:** Pressure die cast 99.6% EC grade pure aluminium.
- **Dynamic Balancing:** Dynamic balancing with high precision balancing machines resulting in low vibration in motors.

Our Company Supplies Electric Motors, Gear Motors, Gear Boxes, & Ac Drives (0.5 H.P. to 1000 H.P.) in various Brands.



BELT & DISC GRINDER



H.P. : 0.5 H.P. to 3.0 H.P.
Voltage : 220v & 415v
R.P.M. : 2800
Rating : 0.373 Kw to 2.2 Kw
Belt Size : 1220 x 150 mm
Discs Size : 6 Inch & 10 Inch

BELT SANDER



H.P. : 0.5 H.P. to 5.0 H.P.
Voltage : 220v & 415v
R.P.M. : 2800
Rating : 0.373 Kw to 3.72 Kw
Belt Size : 1220 x 150 mm, 50 x 2000 mm, 50 x 3500 mm
Wheel Size : 8 Inch & 10 Inch
Type : Double Belt & Single Belt

BENCH GRINDER



H.P. : 0.18 H.P. to 3.0 H.P.
Voltage : 220v & 415v
R.P.M. : 2800
Rating : 0.13 Kw to 2.2 Kw
Emmry Size : 6 Inch, 8 Inch, 10 Inch, 12 Inch

BUFFING GRINDER



H.P. : 0.5 H.P. to 15.0 H.P.
Voltage : 220v & 415v
R.P.M. : 2800
Rating : 0.373 Kw to 11.18 Kw
Bearings : 2,4,6

VIBRATOR MOTOR



H.P. : 0.25 H.P. to 12.5 H.P.
Voltage : 220v & 415v
R.P.M. : 960 / 1440 / 2800
Frame : 71F / 80F / 90F / 100F / 112F / 132F
Rating : 0.18 Kw to 9.32 Kw
Mounting : Flange (B5), Foot (B3)
Centrifugal Force (N) : 3800 to 124000

P.P. CHEMICAL PROCESS PUMP



H.P. : 0.5 H.P. to 10.0 H.P.
Voltage : 220v & 415v
R.P.M. : 1440 / 2800
Rating : 0.373 Kw to 7.45 Kw
Head : 10 to 100
L.P.M. : 100 to 450

ESTD-1973



TRIPLE - D
ELECTRIC MOTORS

• Distinctive • Durable • Dependable

:: Head Office ::

Shree Ram Electricals

Address: Plot No. 1-4, Sarvoday Society, Opp. Hotel Oasis,
Umiyadham Temple Road, Varachha, Surat-395006, Gujarat, India.

www.tripledmotors.com / co.in info@tripled.co.in

+91 90996 20516 / 81603 40601, 0261-2540412